


# **Limitimer**<sup>®</sup> The Traffic Light for Speakers

## Network Operation

- A network extender is connected to each device
- One timer must be configured as a Server. Remote signal lights or slave timer controls are clients.
- Optional DHCP or manual configuration of IP address depending on requirements of network administrator
- Default IP addresses will not conflict with most popular devices (i.e. routers, printers, etc)

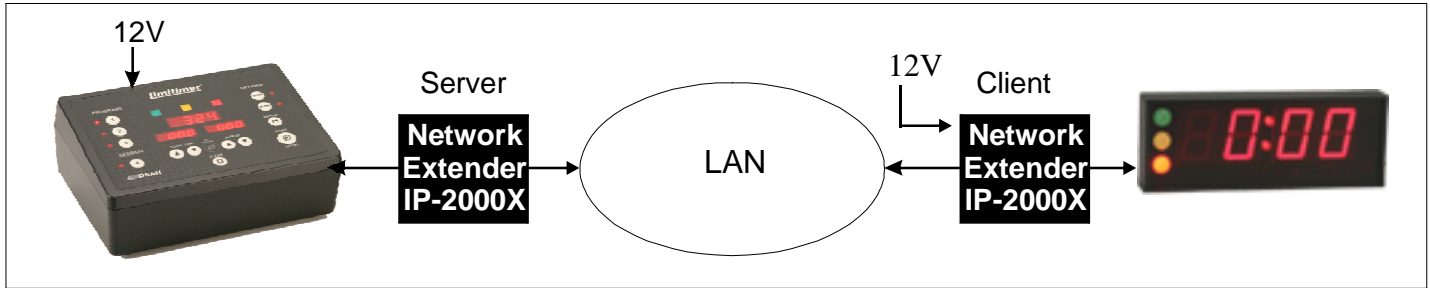

**DSAN.COM**

DSan Corporation  
 Roslyn Heights, NY 11577  
 Tel: 516 625-5608 Email: info@dsan.com

Touch Panel  
 control systems  
 Use TP-2000X